

FIG. 2

iSeries System Debugger

File Edit View Favorites Tools Help

Address C:\DEFAULT Programs /Qsys.lib\Caryst.lib\Aa.pgm\Aa

308

```

20 public void main() {
21     AlphaWidget widget;
22     while (i < 40) {
23         widget = this.getWidget("tool.foo()", "widget.foo2()");
24         widget.run();
25     }
26 }
27
28
29
30
31
32
33
34
35
36
37

```

304

306

302

Add Breakpoint
Enable Breakpoint
Disable Breakpoint
Remove Breakpoint
Remove All Breakpoints
Breakpoint Properties
Pause
Resume
Step Over
Step Over Skip Breakpoints
Step Into
Run Into
Run To Cursor
Run To Cursor Skip Breakpoints
New Monitor
Find
Go To Line...
Change Source View
Help

FIG. 3

150

BREAKPOINT TABLE				
STATEMENT	OP CODE	ADDRESS	RUN INTO #	STACK POSITION
STMT 1	STORE	23453	11	FUNC 6
STMT 8	LOAD	23581	2	FUNC 11
STMT 3	LOAD CONSTANT	27578	4	FUNC 3
STMT 12	STORE	21345	11	FUNC 6
STMT 4	LOAD	25628	8	FUNC 8
402	404	406	408	410

FIG. 4

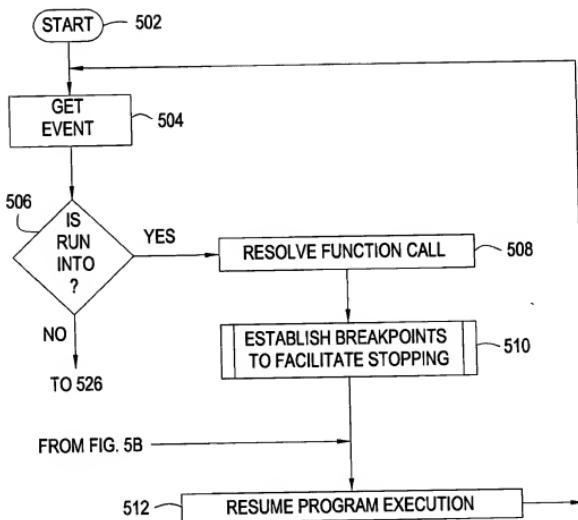
500

FIG. 5A

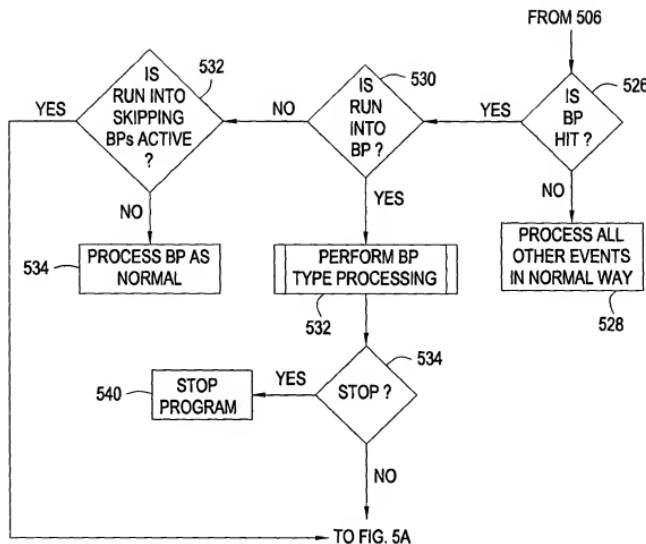


FIG. 5B

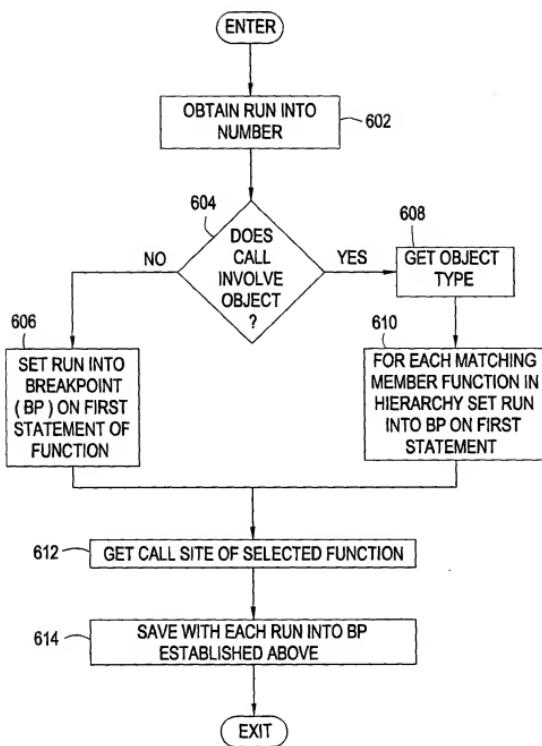
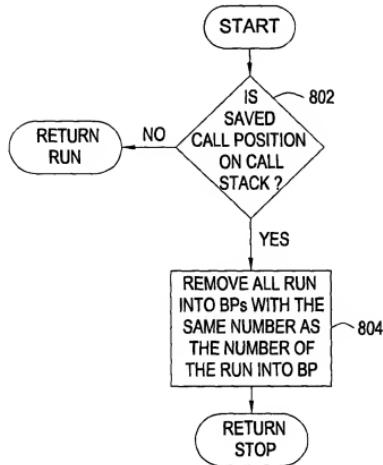
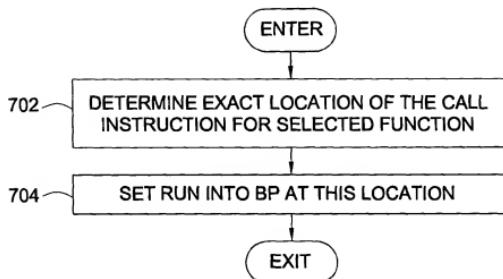


FIG. 6



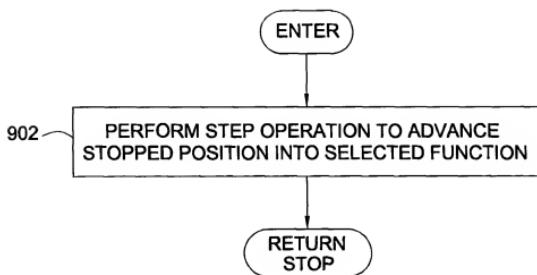


FIG. 9